

2400-2500/5150-5850 MHz HV-POL
Model:QB2458-10D-4N
Electrical Data



Frequency (MHz):	2400-2500	5150-5850
Gain:	10 dBi	12 dBi
VSWR:	<1.8:1	<2.0:1
Polarization:	Horizontal and Vertical	
Horizontal Beamwidth :	360°	
Vertical Beamwidth:	12°	7.2°
Isolation:	>30dB	
Cross-polar ratio:	>20dB	
Nominal Impedance:	50 Ohms	
Max Input Power:	100 W	
Lightning Protection:	DC Ground	

Mechanical Data

Connector :	4*N Female
Dimensions:	Ø84*1260mm
(diameter*length)	Ø3.3*49.6in
Weight:	3.8kg/8.4lb
Radome Material:	UV Resistance PVC
Mounting Method:	Mast
Mast Size:	Ø40-Ø60mm
Rated Wind Velocity:	210km/h
Operating temperature:	-40~+65°C

Shipment Data

Packing Qty:	4pcs/Carton
Carton Size:	1330*280*250mm
(length*width*height)	52.4*11.0*9.8in
Packing Weight:	16.5kg/36.3lb

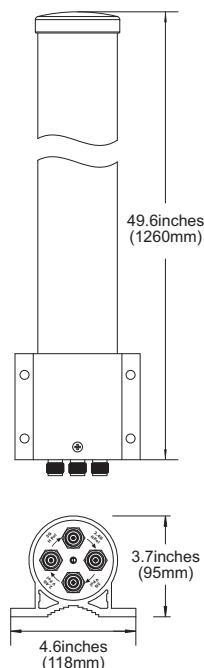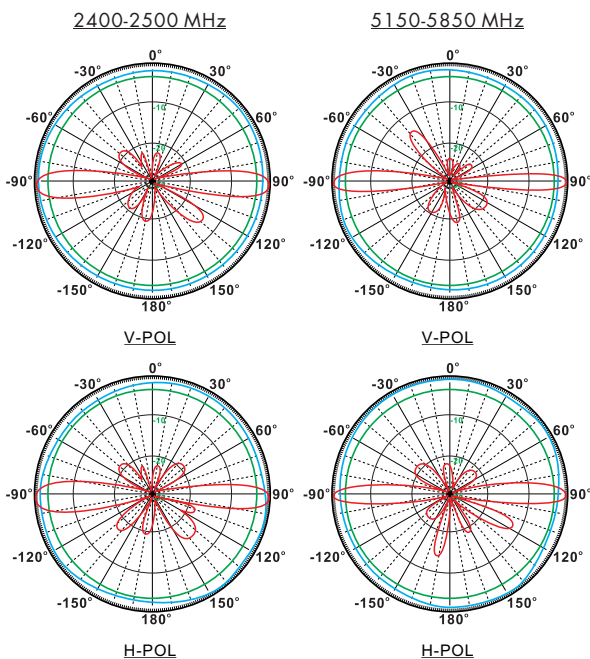

Installation Guide

Model:QB2458-10D-4N

